


型号含义 Meaning of Model

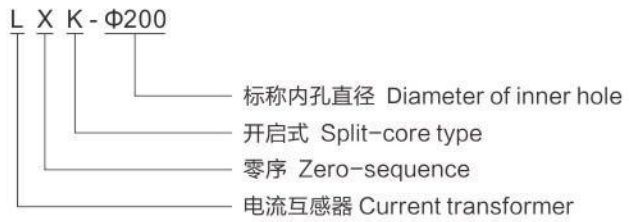

技术参数 Technical data

额定二次电流: 5A或1A
 额定频率: 50Hz或60Hz
 额定连续热电流: 120%In
 负荷的功率因数: $\text{COS}\Phi=0.8$ (滞后)
 工频耐压: 3kV 1min
 环境温度: $-5^{\circ}\text{C}\sim+40^{\circ}\text{C}$
 日均温度: $\leq 35^{\circ}\text{C}$
 海拔高度: $\leq 1000\text{m}$
 污秽等级: II级
 产品标准: GB20840.1、GB20840.2

Rated secondary current : 5A or 1A
 Rated frequency : 50Hz or 60Hz
 Rated continuous thermal current : 120%In
 Power factor of load : $\text{COS}\Phi=0.8$ (lag)
 Power frequency withstand voltage : 3kV 1min
 Environment temperature : $-5^{\circ}\text{C}\sim+40^{\circ}\text{C}$
 Average daily temperature : $\leq 35^{\circ}\text{C}$
 Altitude : $\leq 1000\text{m}$
 Pollution level : II
 Product standard : GB20840.1、GB20840.2

| 用途 Use | 测量电流互感器 Measuring current transformer | | | 保护电流互感器 Protection current transformer | |
|-------------------------------------|--|----|-----|--|------|
| | 准确级及额定负载(VA) Accuracy class and rated load (VA) | | | 准确级及额定负载(VA) Accuracy class and rated load (VA) | |
| 额定一次电流 Rated primary current (A) | 0.5 | 1 | 3 | 10P10 | 10P5 |
| 50 | | | 2.5 | 1.5 | |
| 75 | | | 2.5 | 2.5 | |
| 100 | | | 2.5 | 5 | |
| 150 | | 5 | | 10 | |
| 200 | | 10 | | 15 | |
| 300 | 10 | | | 20 | |
| 400 | 20 | | | 25 | |
| 500 | 40 | | | 30 | |
| 600 | 50 | | | 40 | |

外形及安装尺寸 Overall dimension drawing

