


### 型号含义 Meaning of Model

L X K -  $\Phi$ 300

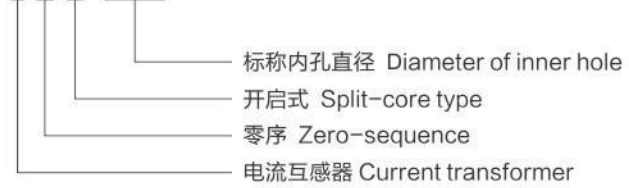

### 技术参数 Technical data

额定二次电流: 5A或1A  
 额定频率: 50Hz或60Hz  
 额定连续热电流: 120%In  
 负荷的功率因数:  $\text{COS}\Phi=0.8$ (滞后)  
 工频耐压: 3kV 1min  
 环境温度:  $-5^{\circ}\text{C}\sim+40^{\circ}\text{C}$   
 日均温度:  $\leq 35^{\circ}\text{C}$   
 海拔高度:  $\leq 1000\text{m}$   
 污秽等级: II级  
 产品标准: GB20840.1、GB20840.2

Rated secondary current : 5A or 1A  
 Rated frequency : 50Hz or 60Hz  
 Rated continuous thermal current : 120%In  
 Power factor of load :  $\text{COS}\Phi=0.8$ (lag)  
 Power frequency withstand voltage : 3kV 1min  
 Environment temperature :  $-5^{\circ}\text{C}\sim+40^{\circ}\text{C}$   
 Average daily temperature :  $\leq 35^{\circ}\text{C}$   
 Altitude :  $\leq 1000\text{m}$   
 Pollution level : II  
 Product standard : GB20840.1、GB20840.2

用途 Use	测量电流互感器 Measuring current transformer			保护电流互感器 Protection current transformer	
	准确级及额定负载(VA) Accuracy class and rated load (VA)			准确级及额定负载(VA) Accuracy class and rated load (VA)	
额定一次电流 Rated primary current (A)	0.5	1	3	10P10	10P5
50			2.5	1.5	
75			3.75	2.5	
100			5	5	
150		3.75		7.5	
200		5		10	
300	5			15	
400	15			20	
500	30			25	
600	40			30	

### 外形及安装尺寸 Overall dimension drawing

